

## SPECIFICATION SHEET PVE 40 PR




High capacity, assemble,


Very quick to Fast and efficient, Very reliable, CAT engine, New type of Cabin


## PVE 40 PR



## **PVE EQUIPMENT USA**

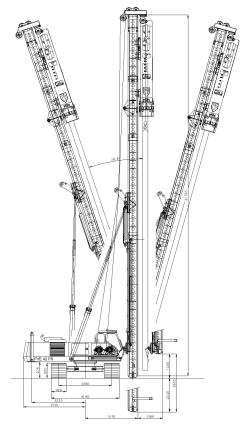

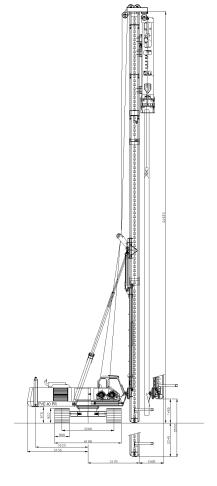

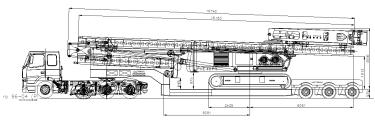

All dimensions are in millimeters

TION S

TECHNICAL SPECIFICA

PVE is continuously improving their range of equipment.
Developments in relation to emission standards and fuel efficiency might result in different specifications.
No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

28,660 lbs (13 ton)
17,636 lbs (8 ton)
13,228 lbs (6 ton)
6,613 lbs (3 ton)
71.5 ft (21,8 mtr)
81.3 ft (24,8 mtr)
Caterpillar C-7
250 HP / 183 kW
TIER 3/4

Hydraulic system	Open Loop
Hydraulic pumps	Rexroth
Hydraulic valve blocks	Rexroth
Transport width	10.83 ft (3.300 mm)
Transport length	54.92 ft (16.740 mm)
Transport height	11.65 ft (3.550 mm)
Recommended hammer	PVE 4NL
Weight base macchine	88,185 lbs (40 ton)

